


INSTALLATION INSTRUCTION

Model: VT-827

LED LIGHT

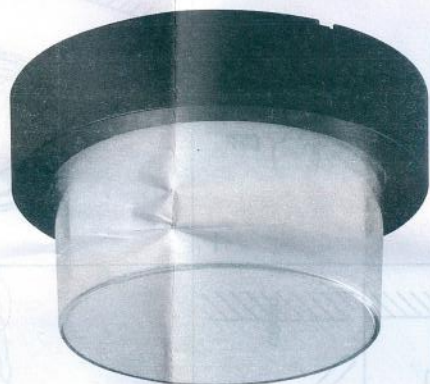

INTRODUCTION


Thank you for selecting and buying V-TAC LED LIGHT. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.

TECHNICAL PARAMETERS

二、Performance & parameter of product

| | lamp | warm white | natural white | cool white |
|-----------------------|-----------------------|--|---------------|------------|
| performance parameter | lumen (lm) | 840lm | 880lm | 920lm |
| | color temperature (K) | 3000K | 4000K | 6400K |
| | CRI | ≥80 | | |
| | type of LED | SMD LED | | |
| | beam angle | 158° | | |
| | decay rate (%) | less than 3% within 1000 working hours | | |
| | total power (W) | 12W | | |
| | lifespan (Hrs) | ≥20000Hrs | | |
| | high voltage testing | 1500Vac/1min | | |
| | lighting efficiency | 100 lm/W | | |
| LED parameter | chip quantity | 72PCS | | |
| | series-parallel way | 12C6B | | |
| | voltage | 25-42VDC | | |
| | current | 280mA | | |
| | | | | |
| driver parameter | input parameter | 220-240VAC, 50/60Hz | | |
| | power factor | >0.5 | | |
| | output parameter | 280mA±5% 36-40VDC | | |
| structure parameter | material | PC | | |
| | dimension | Φ 169*100mm | | |
| | cut-out | \ | | |
| | protection class | II | | |
| | IP | IP65 | | |
| environment parameter | application | hotel、home-lighting、recreation place、supermarket、office building | | |
| | operating temperature | -25℃ ~ 50℃、10% ~ 90% R.H. | | |
| | storage temperature | -30℃ ~ 85℃、0% ~ 95% R.H. | | |
| packing specification | Qty/Ctn | carton size | N.W | G.W |
| | | | | |

STRUCTURE & SIZE

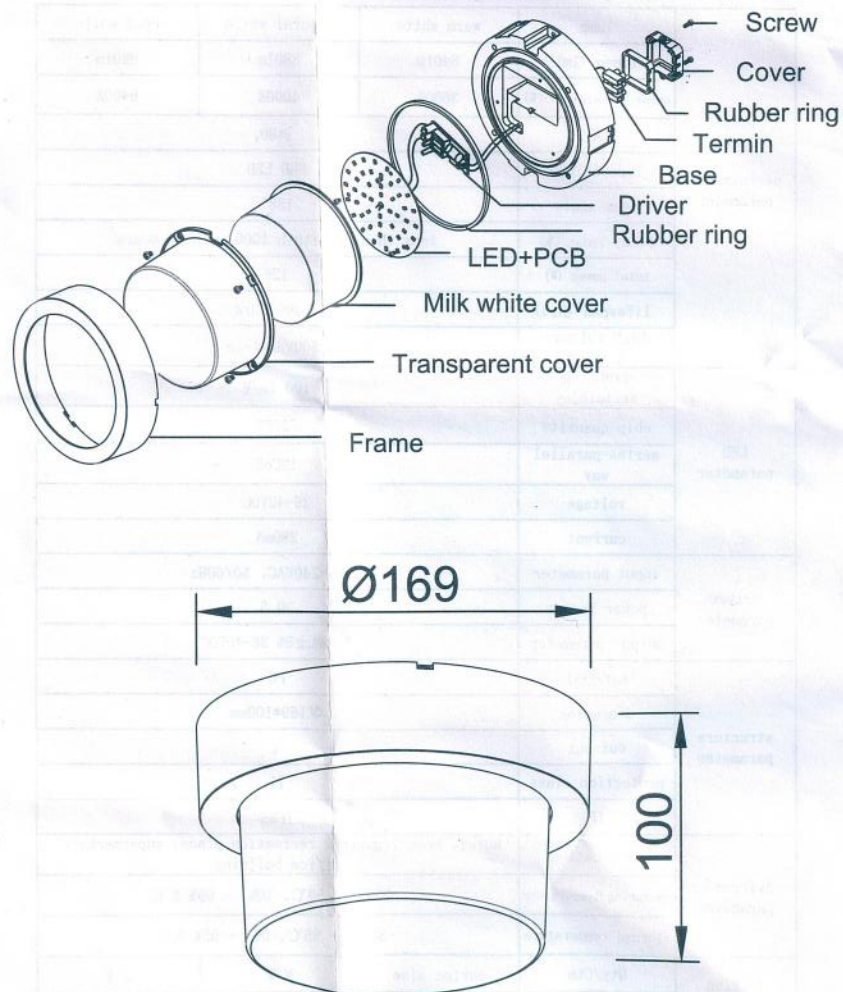

INSTALLATION INSTRUCTION

Installation instructions:

- 1, Switch off the power.
- 2, To install and fix the fixture according to below steps.
- 3, Connect the power (220-240V0) if all the steps are done properly without any mistakes.

